


# UART to I/O Write


Host---->UART\_Root

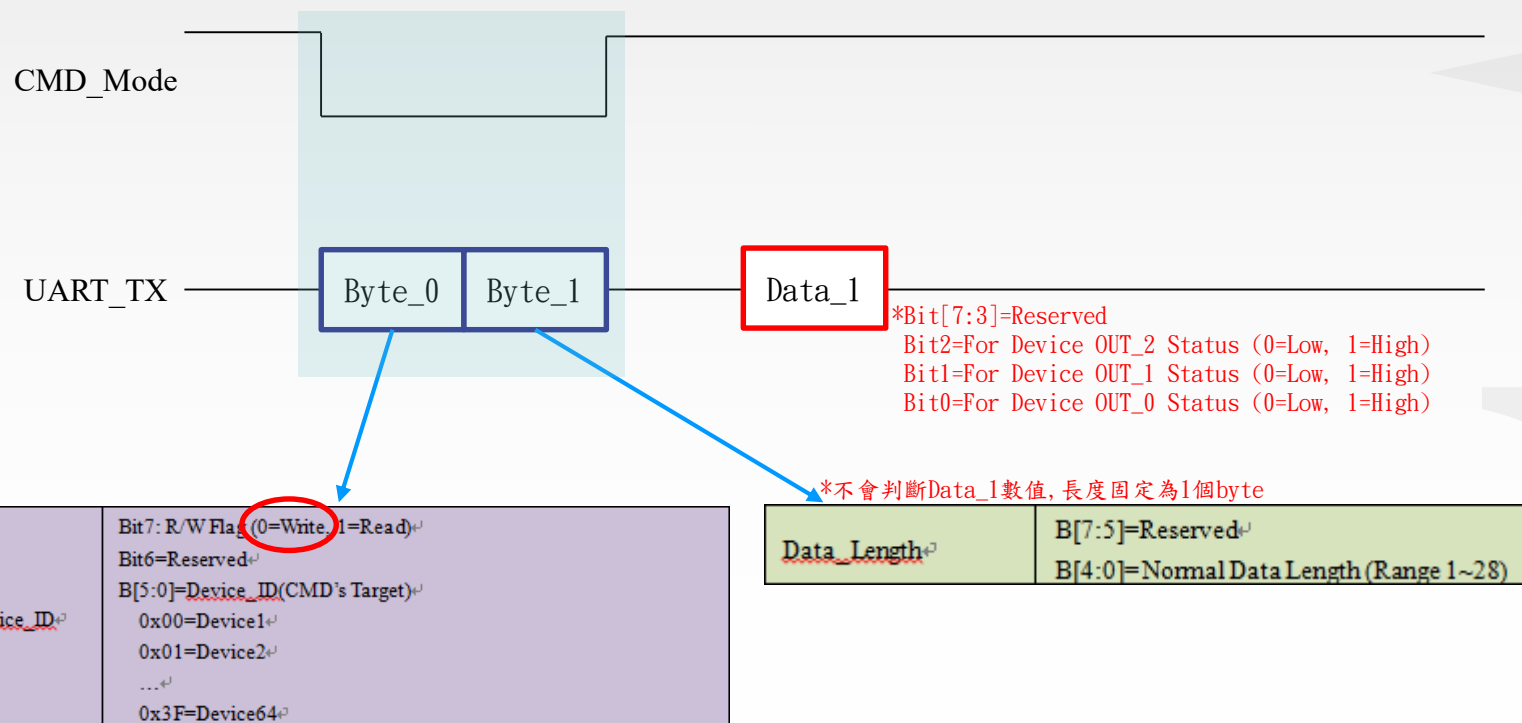

\*每個Write程序都要有 CMD\_Mode(2Byte) + Data\_Mode(For Device OUT0~2 Status), 否則視為無效操作

# UART to I/O Read

Host---->UART\_Root

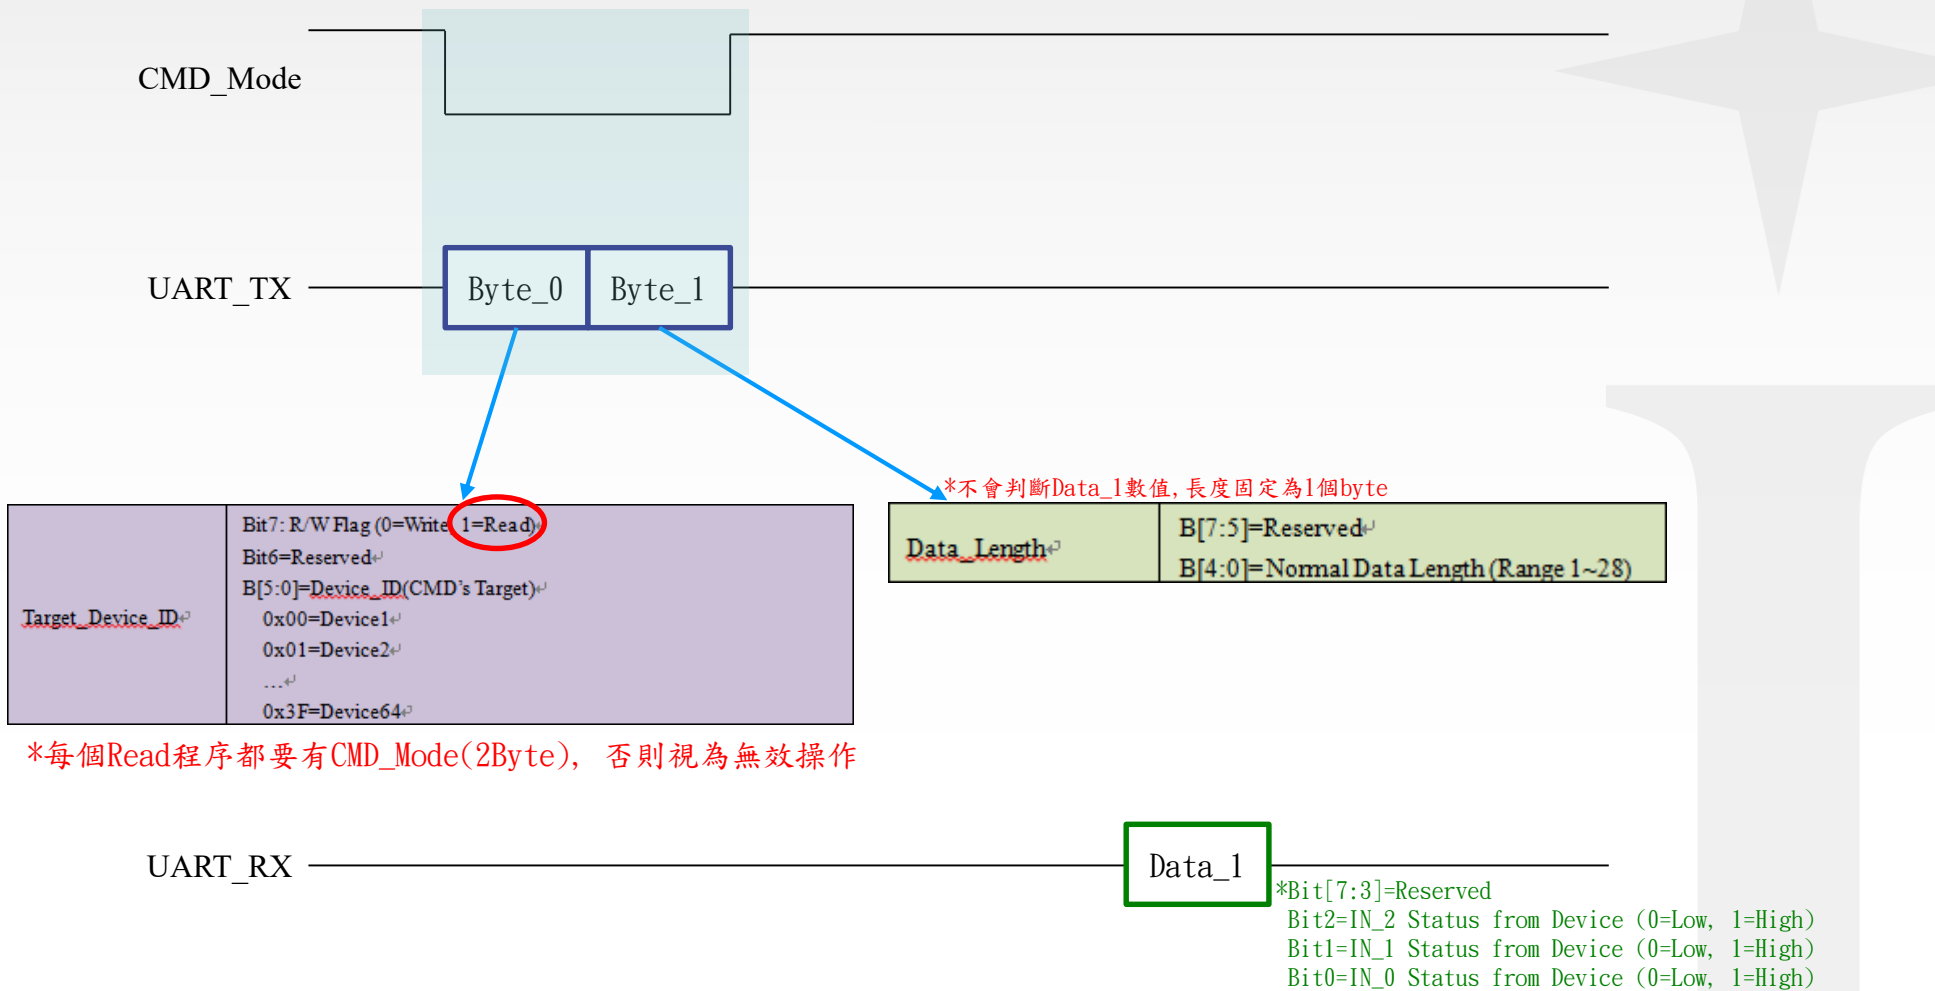

\*每個Read程序都要有CMD\_Mode(2Byte), 否則視為無效操作